

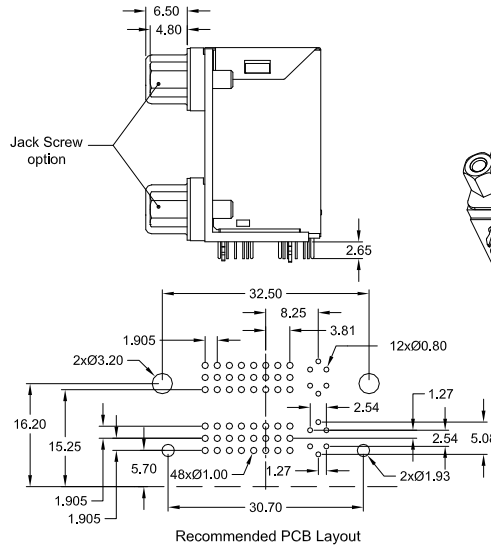


Analog & Digital Type fully shielded

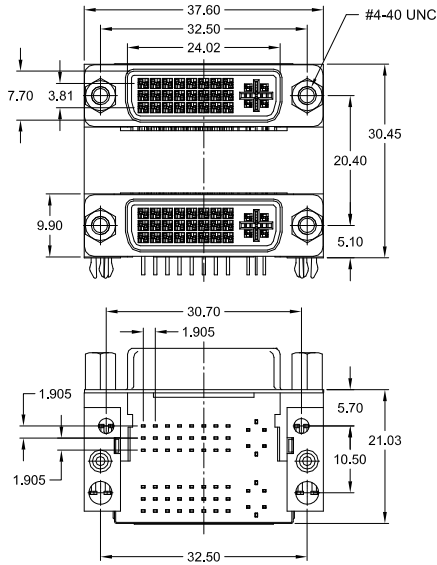

Specifications

Electrical:	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
Mechanical:	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
Material:	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

How to order




DVD - 2929 - NAD9 - xx /W S X

Plating	
95	= Tin (<i>leadfree</i>) / Gold flash
On request:	
97	= Tin (<i>leadfree</i>) / Gold 15 μ "
98	= Tin (<i>leadfree</i>) / Gold 30 μ "

Housing Color	
W	= white (standard)
B	= black (option)

Option	
J	
4 Jack Screws 4-40 UNC	

Digital Type fully shielded

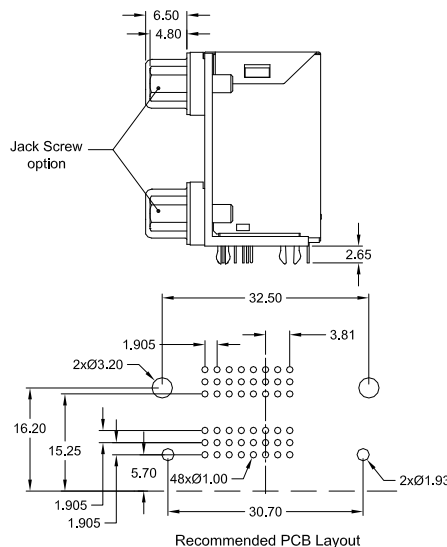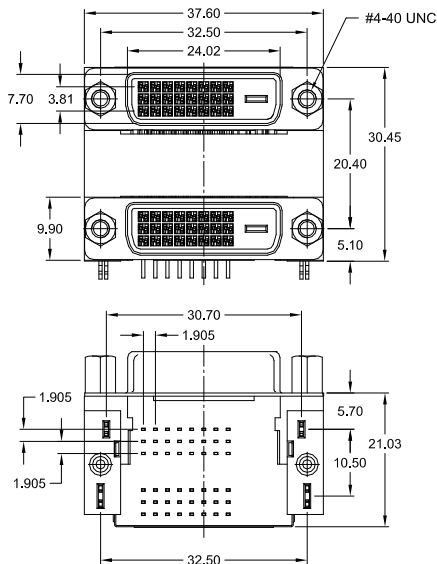

Specifications

Electrical:	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
Mechanical:	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
Material:	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

How to order

DVD - 2424 - NDD9 - xx /W S X

Plating	
95	= Tin (<i>leadfree</i>) / Gold flash
On request:	
97	= Tin (<i>leadfree</i>) / Gold 15 μ "
98	= Tin (<i>leadfree</i>) / Gold 30 μ "

Housing Color	
W	= white (standard)
B	= black (option)

Option	
J	
4 Jack Screws 4-40 UNC	