


Spring loaded contacts and connectors can be found in numerous environments for consumer and professional electronic applications in fixed or mobile equipments for communications, automotive, loading stations, SIM card connectors, docking stations, test & measurement instruments, cameras (picture & film), medical apparatus and many more. The probe pin and connector designs are generally specifically adapted to customer requirements.

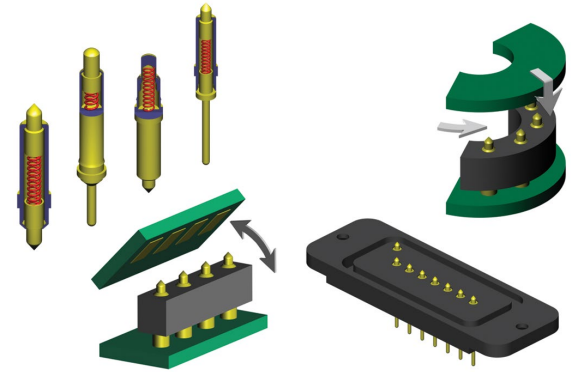

Plunger tip types (please circle your requirement below)

Single point tip	Crown tip	Convex tip	Concave tip

Probe pin types (please circle your requirement below)

Solderless		SMT		Thru-hole
Single point tip	Crown tip	Round tip	Flat tip	Solder tail

Probe pin and Connectors are generally produced to custom specifications.

Please supply a datasheet or a sketch of the required probe pin and/or connector dimensions and highlight the critical requirements for your application. The list above and below covers some of the probe pin aspects which need to be determined or which may be critical for your application.

Please complete and/or tick your requirements and e-mail this page to EMC.

If you need any further assistance, please do not hesitate to call +49(0) 6126 / 9395-0

Overall height DIM. "A" (mm)		Plunger travel (stroke) DIM "B"		Pitch (mm)	
Contact force (N)		Current rating (A)		Mechanical life	
Bandwidth		Operating temperature (°C)			
Material specs for plunger		Name			
Material specs for spring		Email/Phone			
Material specs for barrel		Company Name Address Country			
Material specs for connector body					