

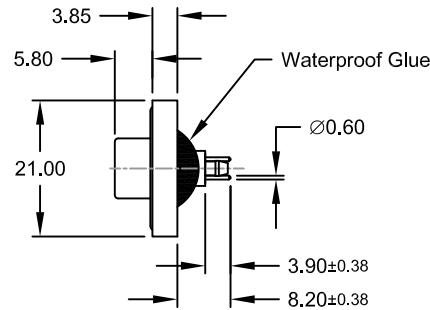



REV.	DESCRIPTION	DATE	DRAWN
A	New	09.03.2011	Ryan
B	frame	23.07.2008	Ronny
C	update	08.08.2019	Ronny

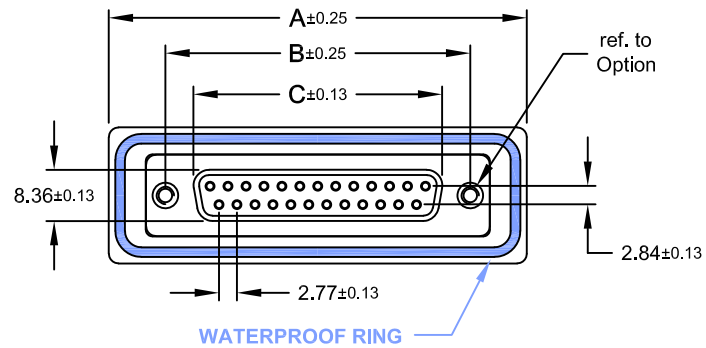

Order Code
SDF-xxx-SIP11-55/BRTX


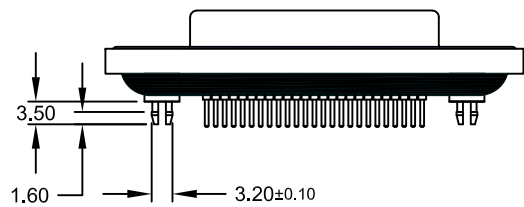


Panel Thickness "X" between 1.20~2.00mm
for Screw "L" = 5.70

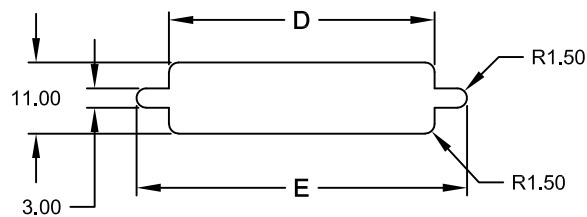


Recommended Panel CUT-OUT

Dimension mm					No. of Contact
A	B	C	D	E	
39,40	24,99	16,92	20,00	28,20	009
47,70	33,30	25,25	28,00	36,50	015
64,50	47,04	38,96	41,50	51,00	025

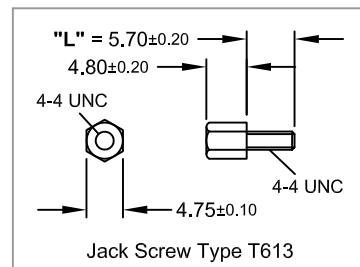

Option: **T**



Option: **TJ**
(Jack Screws mounted)



Material
Contact: Brass
Plating: Au flash over Ni
Insulator: PBT UL 94V-0
Shell: Steel
Plating: Ni
Operating temperature: -55°C to +85°C

Salt Spray: 48 Hours
Waterproof Rate: IP 67 min.

Specifications

Electrical
Current rating: 5A
Insulation resistance: 5000MΩ min.
Contact resistance: 10mΩ max.
Withstanding voltage: 1000V AC rms

E-tec 2019 © - all rights reserved www.e-tec.asia




UNIT	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET 1/2
mm	X.° ±	X. ±	Ryan	09.03.2011	SDF-SIP11/BRT	REV. C
SCALE	.X° ±	.X ±	CHECK	DATE	SERIES NO.	
Free	.XX° ±	.XX ± 0.25	Ronny	08.08.2019	SDF-xxx-SIP11-xx/BRTX	
	.XXX° ±	.XXX ±	APPROVE	DATE		
			Fagi	08.08.2019		


Waterproof D-Sub
Standard "Female"
Straight Solder Tail Type
with Board Lock

REV.	DESCRIPTION	DATE	DRAWN
A	New	09.03.2011	Ryan
B	frame	23.07.2008	Ronny
C	update	08.08.2019	Ronny


RECOMMENDED PCB HOLE LAYOUT "FEMALE"

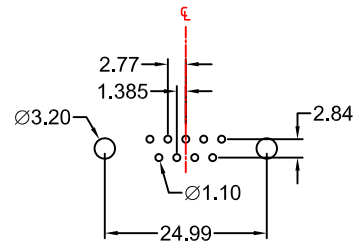

9-contact

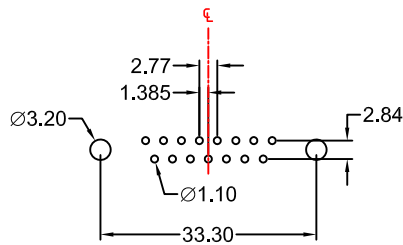

15-contact

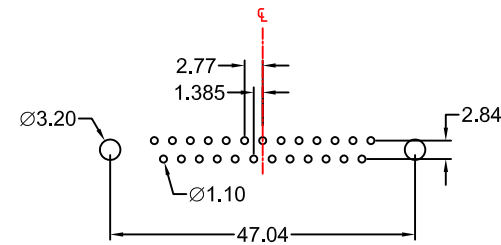

25-contact

Layout Top View
(Tolerance ±0.05)

E-tec 2019 © - all rights reserved www.e-tec.asia



UNIT mm	GENERAL TOLERANCE		DRAWN Ryan	DATE 09.03.2011	DWG. NO. SDF-SIP11/BRT	SHEET 2/2
	X.° ±	X. ±				
	SCALE Free	.X° ±	.X ±	CHECK Ronny	DATE 08.08.2019	REV. C
		.XX° ±	.XX ± 0.25	APPROVE Fagi	DATE 08.08.2019	SERIES NO. SDF-xxx-SIP11-xx/BRTX
.XXX° ±		.XXX ±				

PCB Hole Layout for
Waterproof D-Sub
Standard "Female"
Straight Soldertail Type
with Board Lock