


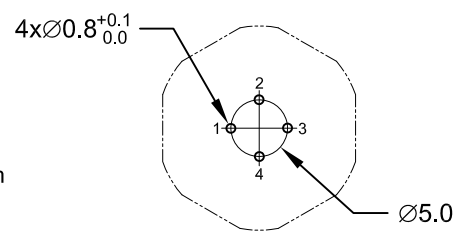



REV.	DESCRIPTION	DATE	DRAWN
A	New	16.12.2016	Cherry
B	General update	04.07.2019	Cheng



Order Code
M12-FD04-TVFP-55/00

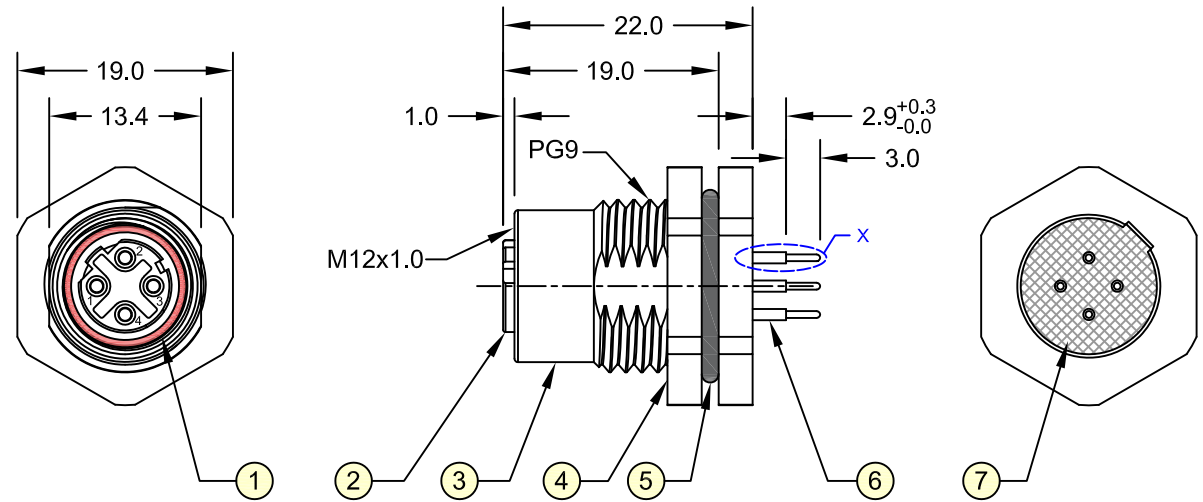

Specifications
Electrical
Current rating: 4A per contact
Insulation resistance: 100MΩ min.
Voltage rating: 250V AC/DC
Withstanding voltage: 1400V AC

Mechanical Requirements
Waterproof rate: IP68
Recommended panel thickness: 0.8 to 5.0mm
Recommended torque: 9~10 kgf-cm
Operating life: 100 cycles min.

In accordance with IEC 61076-2-101:2012

Item	Part Name	Materials / Finish(Color)	Q'TY
1	O-Ring	Silicone / Red	1
2	Housing	Thermoplastic / Black	1
3	Metal Body	Copper Alloy / Ni Plated	1
4	Hex Nut	Copper Alloy / Ni Plated	1
5	O-Ring	NBR / Black	1
6	Contact	Copper Alloy / Au Plated	4
7	Glue	Epoxy / Black	-

E-tec 2019 © - all rights reserved www.e-tec.asia



UNIT	mm	GENERAL TOLERANCE		DRAWN	Cherry	DATE	16.12.2016	DWG. NO.	M12-FD04-TVFP-55/00	SHEET 1/1
SCALE	Free	X.° ±	X. ±	CHECK	Cheng	DATE	04.07.2019	SERIES NO.	M12-FD04-TVFP-55/00	REV. B
		.XX° ±	.XX ± 0.20	APPROVE	Fagi	DATE	04.07.2019			
		.XXX° ±	.XXX ±							

M12 Circular Connector
4-Pin Female D - Coding Type
THT - Panel Front Mount