

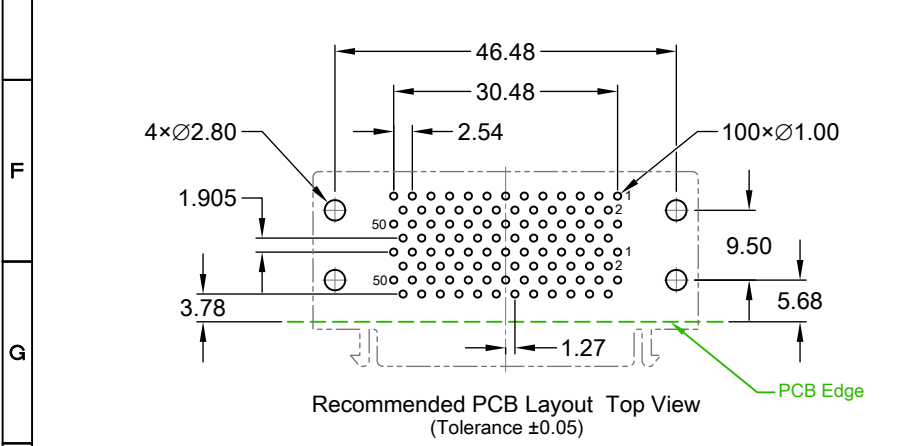


7		8	
REV.	DESCRIPTION	DATE	DRAWN
A	New	09.06.2022	Cheng

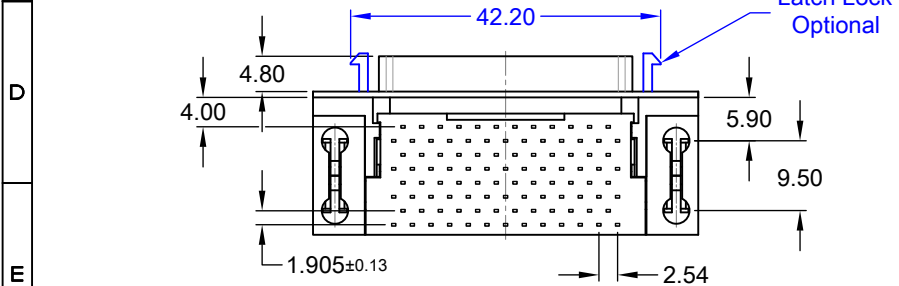

Order Code
CSD-5050-6-95-FVx-x

- Thread Options**
- 0** = UNC #4-40
 - 1** = UNC #2-56
- Latch Lock Options**
- 2** = with Latch Lock
 - 3** = without Latch Lock

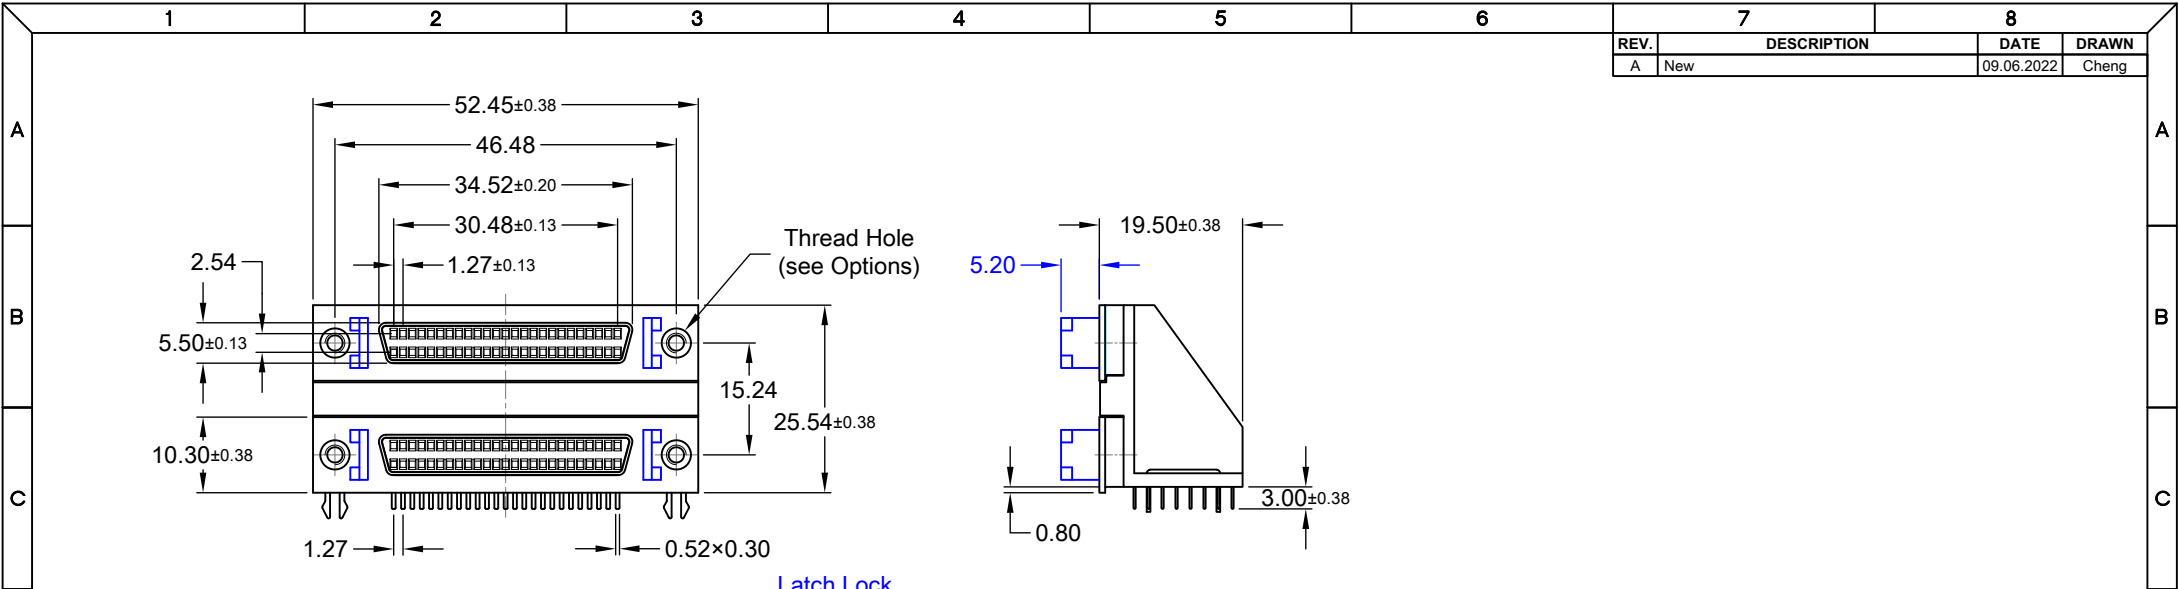

Specifications

Electrical
 Current rating: 1A per contact
 Insulation resistance: 1000MΩ min.
 Contact resistance:
 35mΩ max. (Upper)
 20mΩ max. (Lower)
 Withstanding voltage: 500V AC

Material
 Contact: Phosphor bronze
 Plating: Sn on solder over Ni,
 Au flash on contact area over Ni
 Insulator: PBT (black) UL 94V-0
 Shell & Bracket: Zinc alloy, Ni plated
 Boardlock: Copper alloy, Sn plated
 Operating temperature: -55°C to +85°C

E-tec 2022 © - all rights reserved www.e-tec.asia



UNIT mm	GENERAL TOLERANCE		DRAWN Cheng	DATE 09.06.2022	DWG. NO. CSD-5050-6-95-FV	SHEET 1/1
	SCALE Free	X.° ±	X. ±	CHECK Ronny	DATE 10.06.2022	REV. A
		.XX° ±	.XX ± 0.25	APPROVE Fagi	DATE 10.06.2022	SERIES NO. CSD-5050-6-95-FVx-x
		.XXX° ±	.XXX ±			

SCSI II Connector
 50-Pin Female - Dual Port
 1.27mm Pitch - THT - Right Angle