
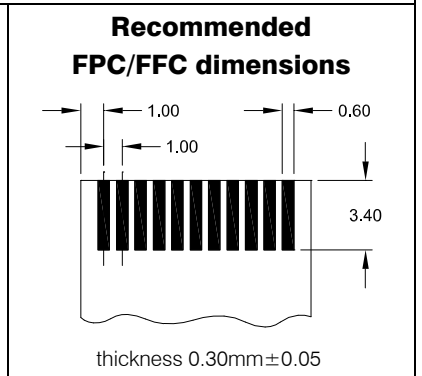
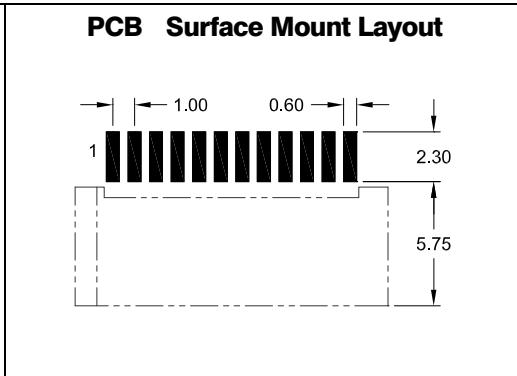
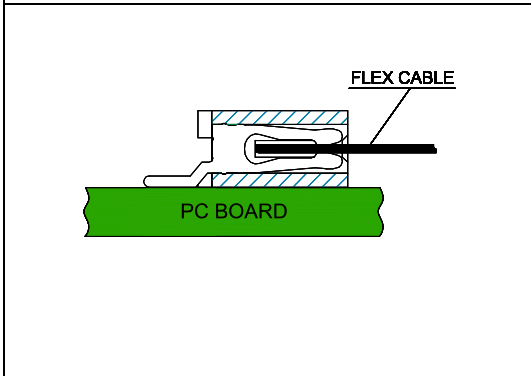


FPC/FFC Connector **LIF Type**  
 - SMT - 1.00mm pitch horizontal

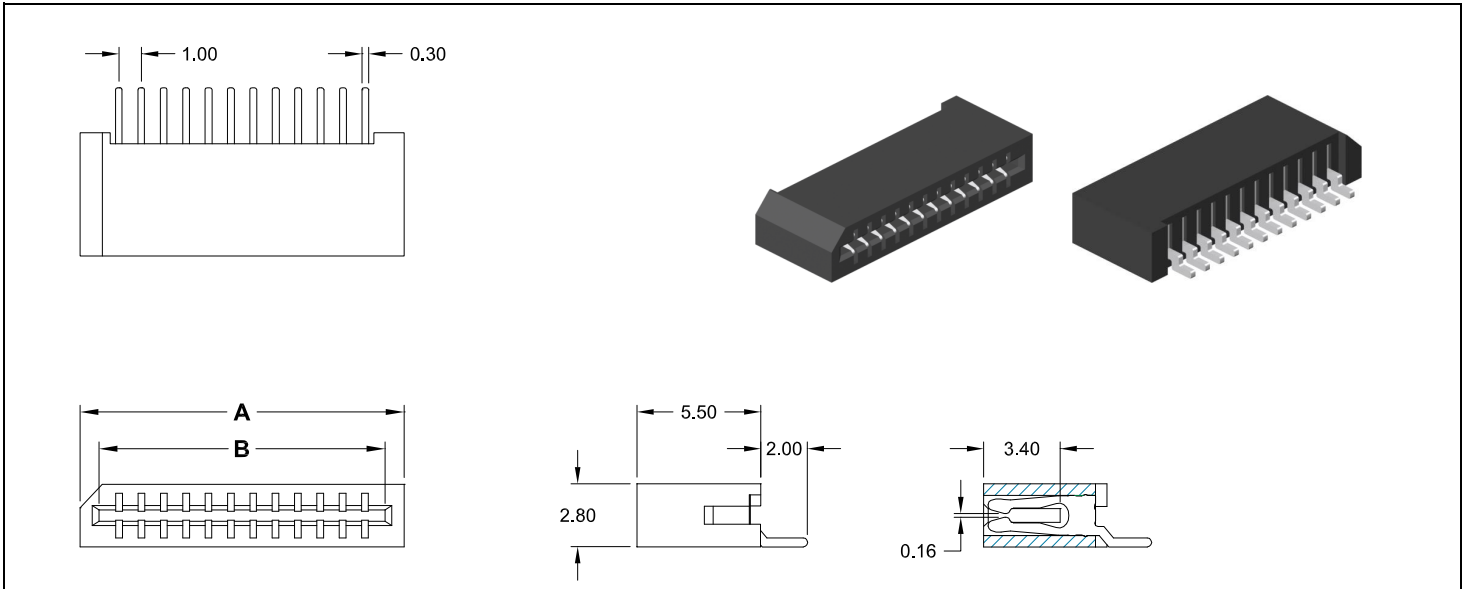

Specifications			
Current rating	0.5 A max.	Operating temperature	- 20°C to +85°C
Insulation resistance	500 MΩ min.	Processing temperature	+250°C +0/-5°C for 3sec.
Contact resistance	30 mΩ max.	Contact material	Phosphor Bronze (RoHS compliant)
Withstanding voltage	500 V AC	Contact plating	Tin (leadfree)
		Insulator material	PA9T (black) UL 94 V-0 (RoHS compliant)

Dimensions (mm)											
Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"
003	6.00	4.10	012	15.00	13.10	021	24.00	22.10	030	33.00	31.10
004	7.00	5.10	013	16.00	14.10	022	25.00	23.10			
005	8.00	6.10	014	17.00	15.10	023	26.00	24.10			
006	9.00	7.10	015	18.00	16.10	024	27.00	25.10			
007	10.00	8.10	016	19.00	17.10	025	28.00	26.10			
008	11.00	9.10	017	20.00	18.10	026	29.00	27.10			
009	12.00	10.10	018	21.00	19.10	027	30.00	28.10			
010	13.00	11.10	019	22.00	20.10	028	31.00	29.10			
011	14.00	12.10	020	23.00	21.10	029	32.00	30.10			

How to order

FCL - xxx - H100 - 99 /X

