



1.27mm pitch Pin Header  
- THT - single row straight

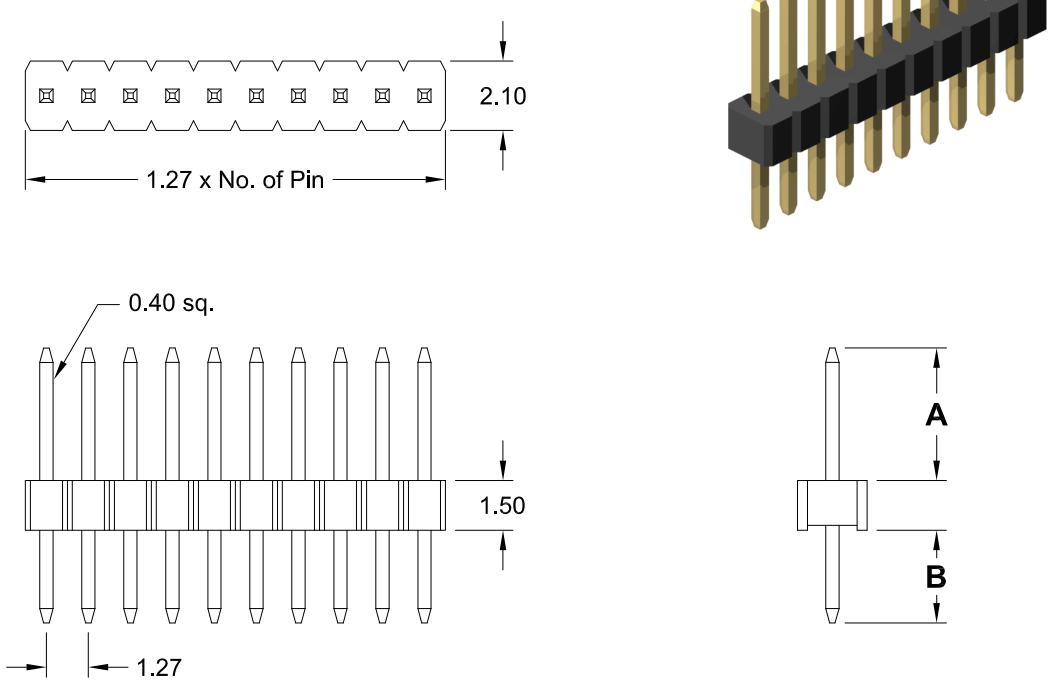

**Specifications**

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper alloy
Insulator material	(RoHS compliant) PA6T UL 94 V-0

**PCB Hole Layout**

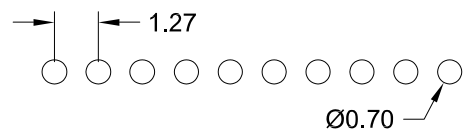

**How to order**

SL1 - xxx - B xxx/x - 55/11

Nbr of pins
002 to 050

Pin code	DIM "A"	DIM "B"
083/0	4.00 mm	2.80 mm
083/1	1.70 mm	2.40 mm
083/2	3.90 mm	3.90 mm
083/3	4.50 mm	2.80 mm
083/4	3.00 mm	3.00 mm
083/5	8.90 mm	7.60 mm
083/6	3.00 mm	2.30 mm
083/7	3.60 mm	2.80 mm
083/8	3.00 mm	2.80 mm
other dimensions on request		

Plating
55 = Gold
other platings on request