
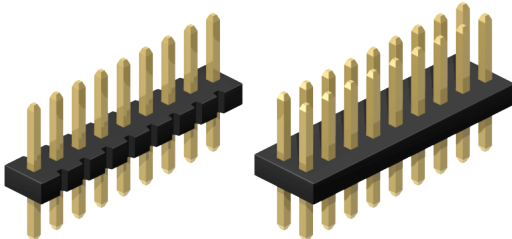
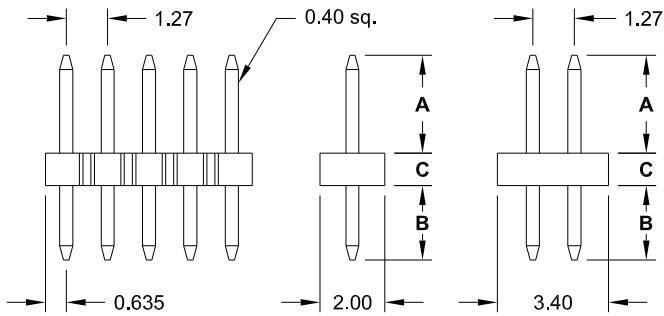
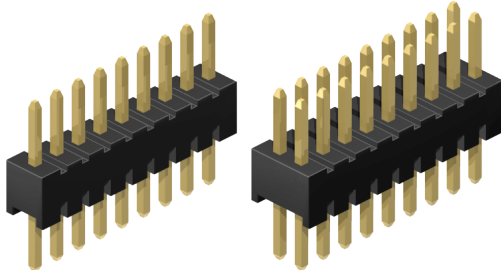
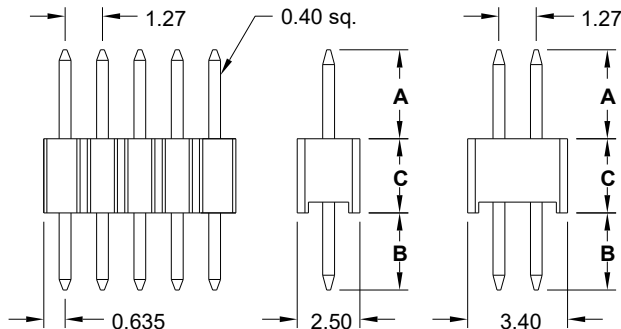
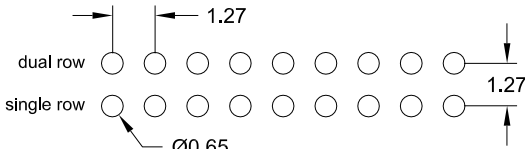


1.27mm pitch Pin Header
- THT - single & dual row straight

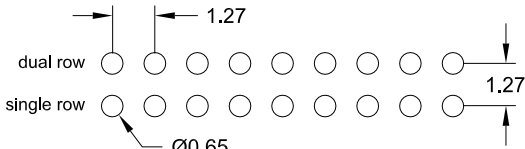

Style S063/x & S064/x  	Style S081/x  												
PCB Hole Layout 	PCB Hole Layout 												
Specifications <table><tr><td>Current rating</td><td>1 A</td><td>Operating temperature</td><td>- 40°C to +105°C</td></tr><tr><td>Insulation resistance</td><td>1000 MΩ min.</td><td>Contact material</td><td>(RoHS compliant) Copper Alloy</td></tr><tr><td>Withstanding voltage</td><td>500 V AC</td><td>Insulator material</td><td>(RoHS compliant) PA6T UL 94 V-0</td></tr></table>		Current rating	1 A	Operating temperature	- 40°C to +105°C	Insulation resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper Alloy	Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) PA6T UL 94 V-0
Current rating	1 A	Operating temperature	- 40°C to +105°C										
Insulation resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper Alloy										
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) PA6T UL 94 V-0										

How to order

SL x - xxx - S xxx/x - 55/11

Rows	Nbr of pins	Pin code	DIM "A"	DIM "B"	DIM "C"	Plating
1 = single row	002 to 050	063/1	3.00 mm	2.30 mm	1.00 mm	55 = Gold other platings on request
		063/2	7.00 mm	2.30 mm	1.00 mm	
		063/3	5.00 mm	2.30 mm	1.00 mm	
		063/4	3.10 mm	1.90 mm	1.00 mm	
		063/5	2.80 mm	2.50 mm	1.00 mm	
		064/0	7.50 mm	5.00 mm	1.50 mm	
		Insulator thickness 2.00mm on request.				
		081/1	3.00 mm	2.60 mm	2.50 mm	
		081/2	4.00 mm	2.60 mm	2.50 mm	
		081/3	6.00 mm	2.60 mm	2.50 mm	
		other dimensions on request				
2 = dual row	004 to 100					