


Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) PA6T UL 94 V-0

PCB Hole Layout

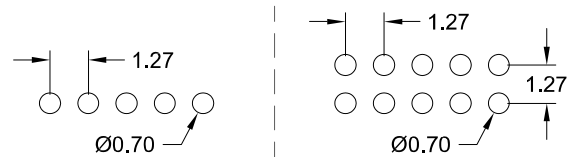

How to order

SL x - xxx - R xxx/x - 55/11

Rows	Nbr of pins	Pin code	DIM "A"	DIM "B"	DIM "C" (1 row)	DIM "C1" (2 row)	Plating
1 = single row	002 to 050	071/0	3.80 mm	3.00 mm	1.50 mm	1.70 mm	55 = Gold
		071/1	4.80 mm	2.50 mm	0.80 mm	1.00 mm	
		071/2	3.00 mm	3.00 mm	1.50 mm	1.70 mm	
		071/3	3.80 mm	4.50 mm	1.50 mm	1.70 mm	
		071/4	3.80 mm	1.60 mm	1.50 mm	1.70 mm	
		071/5	3.00 mm	2.80 mm	1.50 mm	1.70 mm	
2 = dual row	006 to 100	071/6	4.00 mm	4.00 mm	1.50 mm	1.70 mm	other platings on request
		other dimensions on request					