


Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Copper Alloy
Insulator material (RoHS compliant)	PA9T UL 94 V-0

PCB Surface Mount Layout

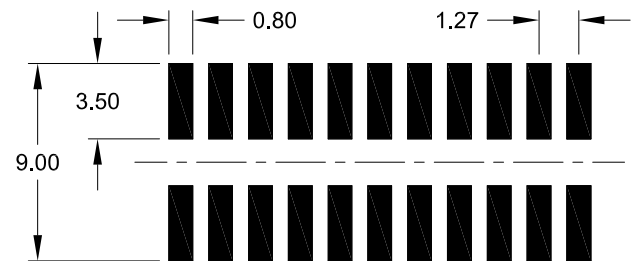

How to order

SP2 - xxx - H 220/x - 55/1 X

Nbr of pins	Pin code	DIM "A"	DIM "B"	Plating	Packing and "PickUp Cap" Option (standard Tube packing; without "PickUp Cap")
006 to 100	220/0	5.60 mm	8.50 mm	55 = Gold	A = Tube packing; with "PickUp Cap" B = Reel packing; with "PickUp Cap"
	220/1	5.60 mm	9.75 mm		
	220/2	3.40 mm	12.00 mm		
	220/3	3.30 mm	6.50 mm		
	220/4	4.00 mm	8.00 mm		
	220/5	6.00 mm	12.00 mm		
	220/6	5.00 mm	12.00 mm		
	other dimensions on request		other platings on request		