


**Specifications**

Current rating	1 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	300 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) LCP UL 94 V-0

**PCB Hole Layout**

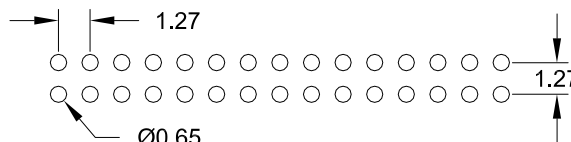

**Application and Features**

Mating with 1.27mm pitch Female Headers BS2-xxx-H45B- & -H45P-55/11 (page 33) as “board to board” connection.

No ejection latches for space saving.

**How to order**

**SLS - xxx - R xxx/x - 55/11**

