


1.27mm pitch Female Header
- THT - dual row straight & right angle

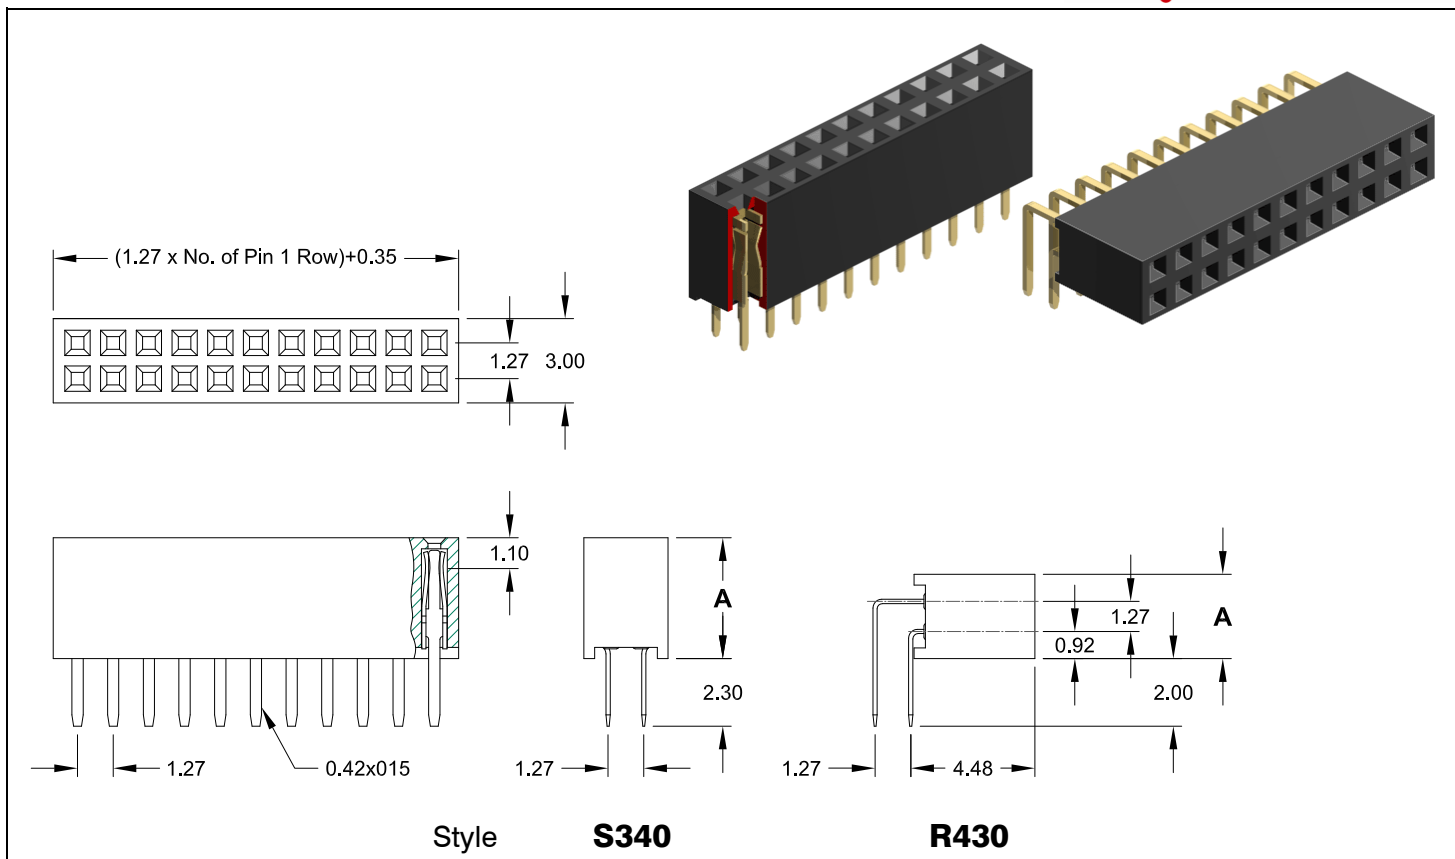

| Application and Features | PCB Hole Layout |
|--|-----------------|
| <ul style="list-style-type: none"> ■ 3.40 or 4.40mm height above board straight type ■ Hi-rel dual beam contact assures reliable PC-Board connections ■ Accepts 0.40mm square pins ■ Stand-off's facilitate post solder cleaning ■ Side stackable | |

| Specifications | | | |
|-----------------------|--------------|-----------------------|----------------------------------|
| Current rating | 1 A | Operating temperature | - 40°C to +105°C |
| Insulation resistance | 1000 MΩ min. | Contact material | (RoHS compliant) Phosphor Bronze |
| Contact resistance | 20 mΩ max. | Insulator material | (RoHS compliant) LCP UL 94 V-0 |
| Withstanding voltage | 500 V AC | | |

How to order

BL2 - xxx - X xxx - 55/11

| Nbr of contacts | Style | DIM "A" | Plating |
|-----------------|------------------|---------|---------------------------|
| 006 to 100 | S340 straight | 3.40 mm | 55 = Gold |
| 004 to 100 | S430 straight | 4.40 mm | |
| 004 to 100 | R430 right angle | 3.10 mm | other platings on request |