
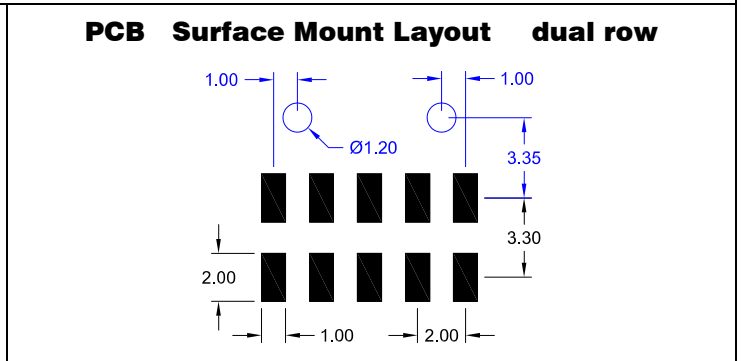
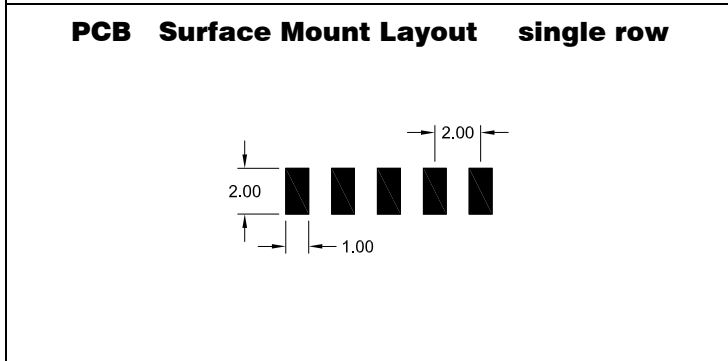


2.00mm pitch Pin Header - slanted -  
- SMT - single and dual row

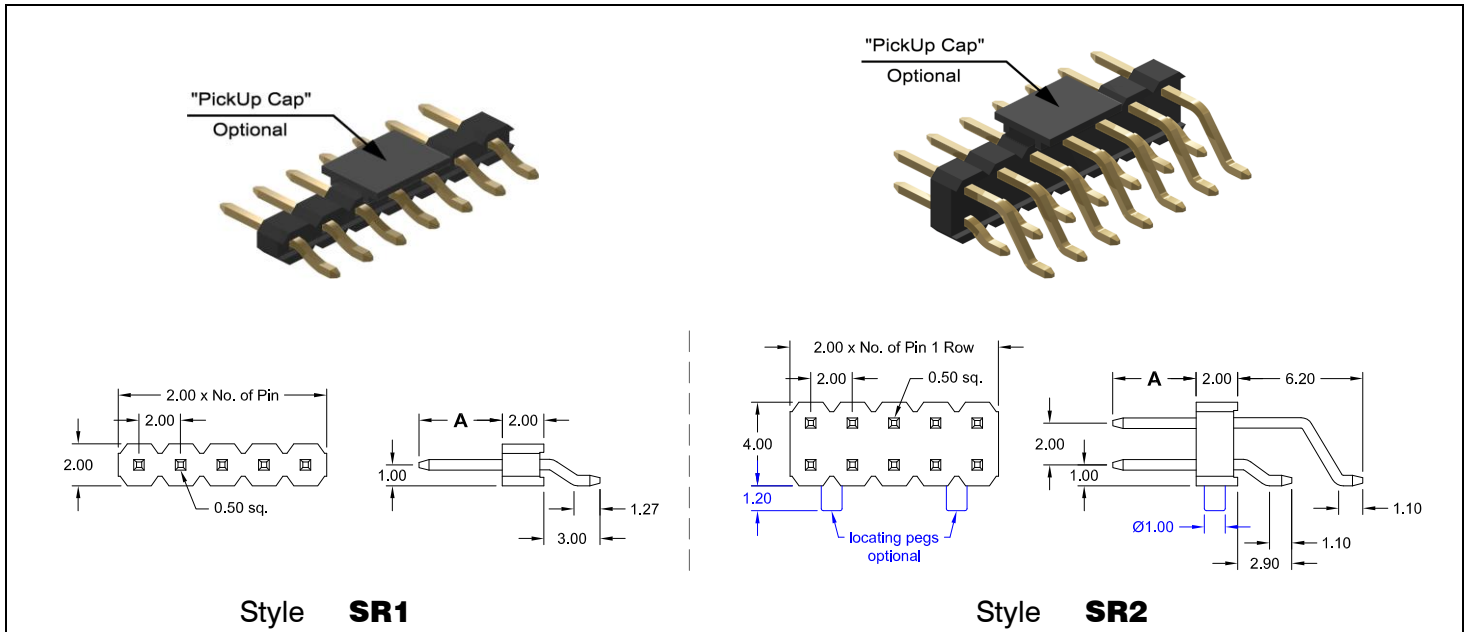

**Specifications**

Current rating 2 A  
Insulation resistance 1000 MΩ min.  
Withstanding voltage 500 V AC

Operating temperature - 40°C to +105°C  
Processing temperature +250°C +0/-5°C for 5sec.  
Contact material (RoHS compliant) Copper alloy  
Insulator material (RoHS compliant) PA6T UL 94 V-0

**How to order**

SR x - xxx - H xxx/x - 55/2 X

Rows	Nbr of pins	Pin code	DIM "A"	Plating	Options
<b>1</b> = single row	<b>002</b> to <b>040</b>	<b>093/ 0</b>	4.00 mm	<b>55</b> = Gold  other platings on request	<b>without "locating pegs"</b> <b>A</b> = Tube packing; with „PickUp Cap“ <b>B</b> = Reel packing; with „PickUp Cap“
		<b>093/ 1</b>	4.45 mm		
		<b>093/ 2</b>	3.20 mm		
		<b>093/ 3</b>	6.00 mm		
<b>2</b> = dual row	<b>006</b> to <b>080</b>	<b>122/ 0</b>	4.00 mm		<b>with "locating pegs"</b> (Dual Row Type only) <b>C</b> = Tube packing; without "PickUp Cap" <b>D</b> = Tube packing; with "PickUp Cap" <b>E</b> = Reel packing; with "PickUp Cap"
		<b>122/ 1</b>	6.00 mm		
		<b>122/ 2</b>	4.45 mm		
		<b>122/ 3</b>	5.00 mm		
		<b>122/ 4</b>	3.20 mm		
		<b>122/ 5</b>	3.50 mm		
		<b>122/ 6</b>	8.00 mm		
<b>122/ 7</b>	4.80 mm				