
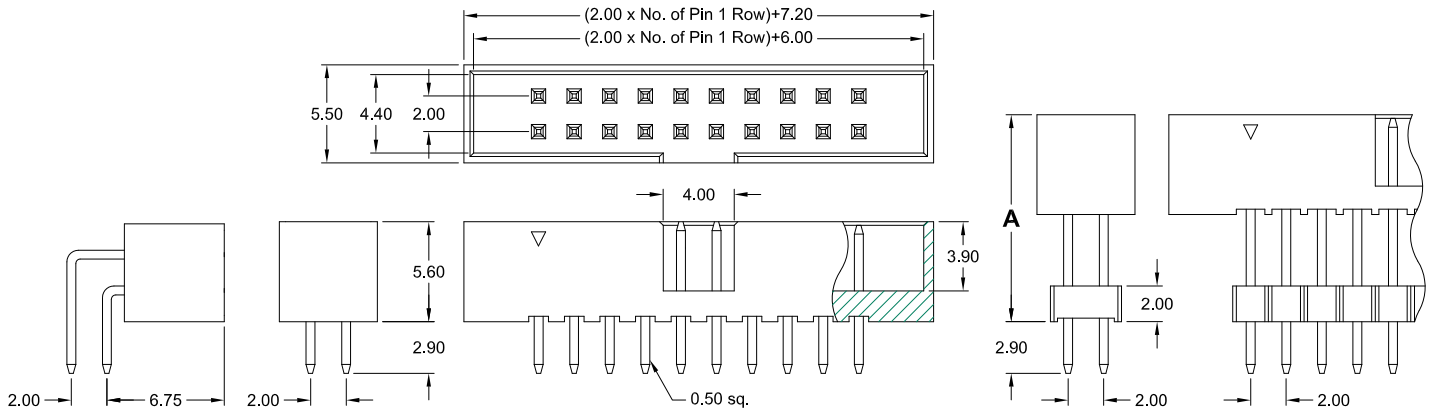




2.00mm pitch

Box Header

- THT - right angle - straight - raised



Style **R562**


**S562**

**D762/xx**

**Application and Features**

- Designed to mate with IDC female connector IDS-xxx-X200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

**PCB Hole Layout**

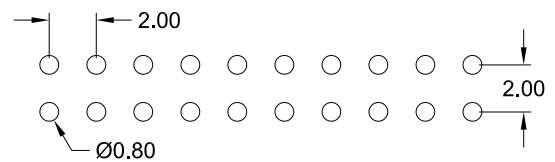

**Specifications**

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper alloy
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) PBT UL 94 V-0

How to order

SLS - xxx - Xxxx - 55/2

Nbr of pins
<b>006</b> to <b>068</b>
except: 038; 042; 046; 048; 052 054; 056; 058; 062; 066

Style
<b>S562</b> = straight
<b>R562</b> = right angle
<b>Raised Style:</b>
<b>D762/00</b> DIM "A" = 7.60 mm
<b>D762/01</b> DIM "A" = 17.80 mm
<b>D762/02</b> DIM "A" = 10.40 mm
other dimensions on request

Plating
<b>55</b> = Gold
other platings on request