



IDC pitch 1.27mm

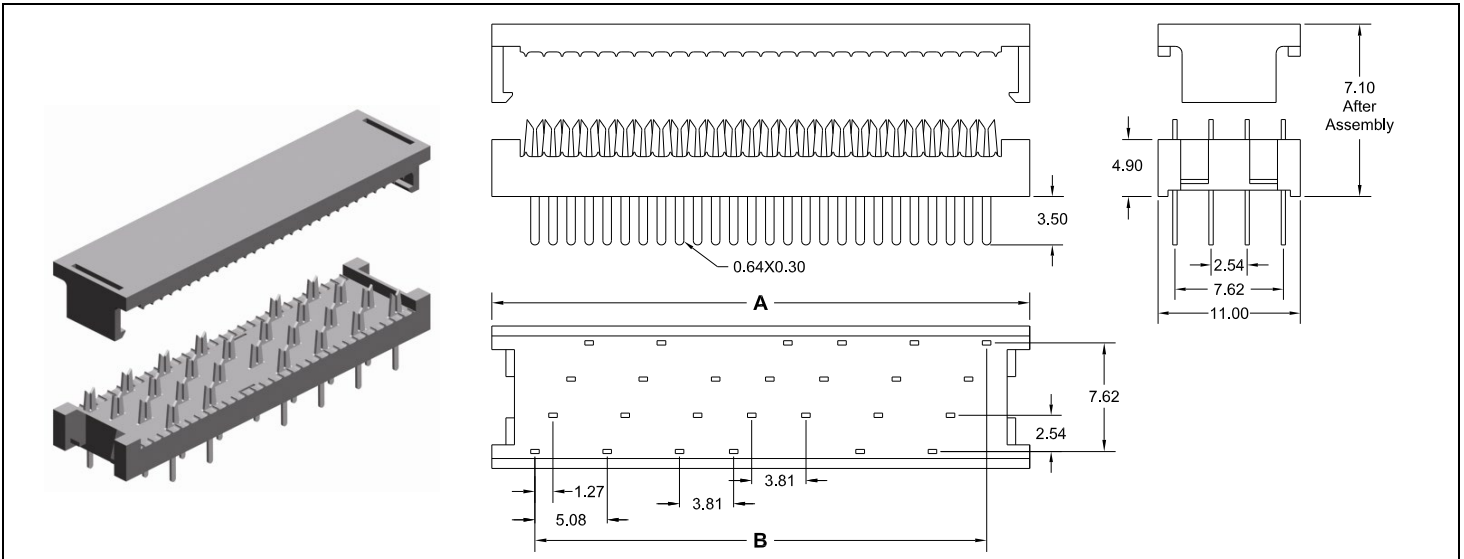

Dimensions

DIM	10 pos.	16 pos.	20 pos.	26 pos.	34 pos.	40 pos.
A	18.17 mm	25.79 mm	30.87 mm	38.49 mm	48.65 mm	56.27 mm
B	11.43 mm	19.05 mm	24.13 mm	31.75 mm	41.91 mm	49.53 mm

PCB Hole Layouts

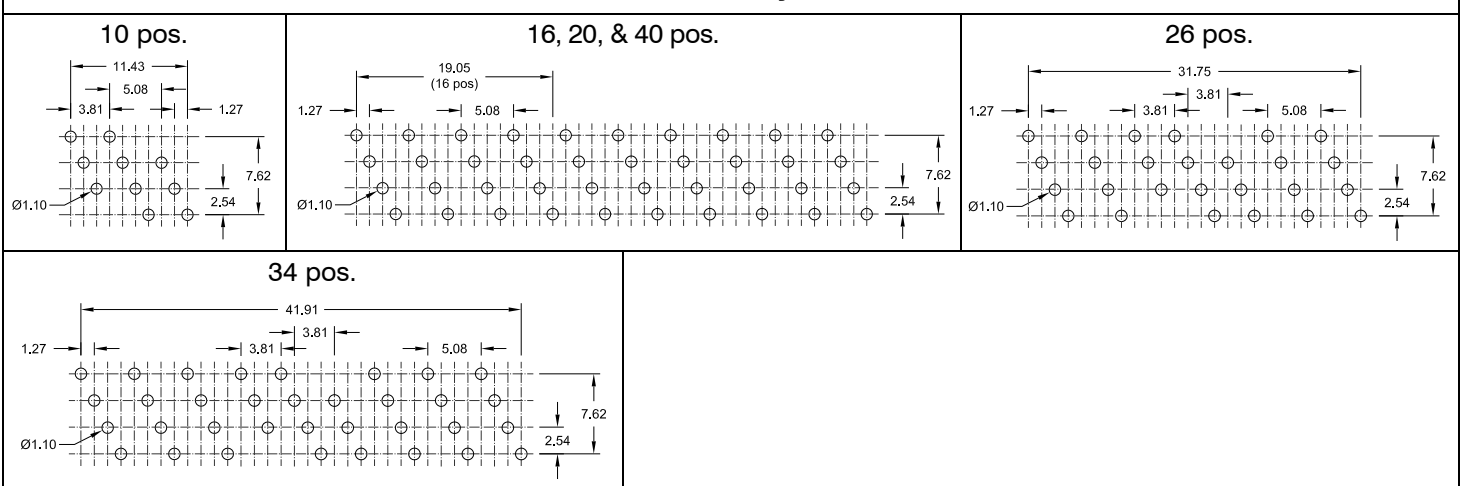

Application and Features

Designed for 1.27mm (.050") centre flat ribbon cable.
 Low profile with only 7.10mm above board after assembly.
 Designed for direct soldering to PCB.

Specifications

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Contact material (RoHS compliant)	Phosphor Bronze
Contact resistance	30 mΩ max.	Insulator material (RoHS compliant)	PBT UL 94 V-0
Withstanding voltage	500 V AC		

How to order

IDP - xxx - T050 - 99

