


RF Connectors

SMA Reverse Series




SMA Reverse connectors with 50Ω impedance are designed for using in spread spectrum wireless applications which a non-standard interface is needed.

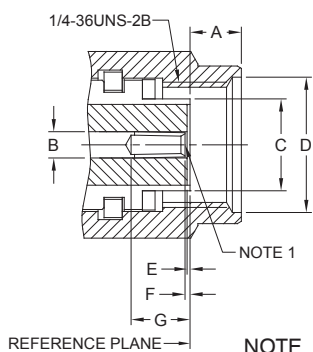

PLUG

Dimension	PLUG	
	Millimeters	
	Minimum	Maximum
A	2.54	3.43
B	1.24	1.30
C	4.53	4.59
D	6.35	6.73
E	0.00	0.25
F	0.00	0.25
G	2.92	--

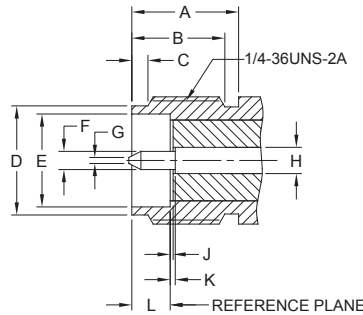

JACK

Dimension	JACK	
	Millimeters	
	Minimum	Maximum
A	5.54	--
B	4.32	--
C	0.38	1.14
D	5.28	5.49
E	4.60	4.67
F	0.90	0.94
G	0.00	0.38
H	1.24	1.30
J	0.00	0.25
K	0.00	0.25
L	1.88	1.98

NOTE

In order to meet the VSWR and CR values as specified, the inner hole diameter needs to be mated with a 0.9/0.94mm dia. pin.

Electrical		
Impedance		50 Ω
Frequency Range		0 - 12.4 GHz on Flexible cable 0 - 18 GHz on Semi-rigid cable
Working Voltage		RG-178: 170 V rms max. RG-316, .085": 250 V rms max. RG-142, .141": 335 V rms max. RG-178: 500 V rms min. RG-316, .085": 750 V rms min. RG-142, .141": 1000 V rms min.
Dielectric Withstanding Voltage		
VSWR	Straight Right Angle	1.3 max. 1.5 max.
Contact Resistance	Center Contact Outer Contact	6 mΩ max. 2 mΩ max.
Insulator Resistance		5000 MΩ min.

Material		
Parts Name	Material	Finish
Body, Metal Parts	Brass per QQ-B-626	Gold 0.07μm (3 μ")
Center Contacts	Male: Brass per QQ-B-626 Female: Beryllium copper per QQ-C-530	Gold 0.75μm (30 μ") Gold 0.75μm (30 μ")
Insulators	Teflon	None
Crimp Ferrules	Annealed Brass	Gold 0.07μm (3 μ")
Crimp Gaskets	Silicone rubber	None

NOTE: Other materials and platings are available on request.

Mechanical & Environmental	
Engagement Force	22 cNm max.
Disengagement Force	22 cNm max.
Coupling Nut Retention	678 cNm min.
Coupling Proof Torque	170 cNm min.
Contact Retention	68 cNm min.
Durability(Mating)	500 cycles min.
Temperature Range	-65°C to +155°C
Vibration	MIL-STD-202 Method 204 Test Cond. B.
Salt Spray	MIL-STD-202 Method 101 Test Cond. B.
Thermal Shock	MIL-STD-202 Method 107 Test Cond. B.

How to order

RF X - SR X - XX X 5 xx - 58

Gender

P = Plug
J = Jack

Orientation

R = Right Angle
S = Straight

Mounting Type / Adaptor Type

B1 = THT Board Mount
C1 = Crimp Cable

other types on request

Detail

N = Not defined


others on request

Cable Group / Receptacle Type


Code allocated
by E-tec

RF Connectors




SMA Reverse Series

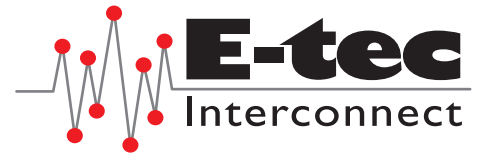

STRAIGHT THT JACK




Order Code
RFJ-SRS-B1N592-58






PCB Hole Layout

R/A THT JACK




Order Code
RFJ-SRR-B1N592-58

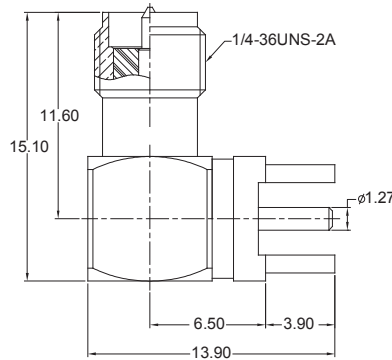


PCB Hole Layout


CRIMP JACK




Order Code
RFJ-SRS-C1N502-58

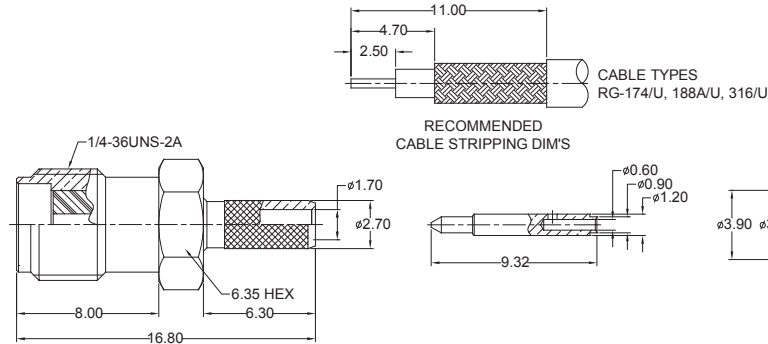


RECOMMENDED
CABLE STRIPPING DIM'S




CRIMP PLUG




Order Code
RFP-SRS-C1N502-58

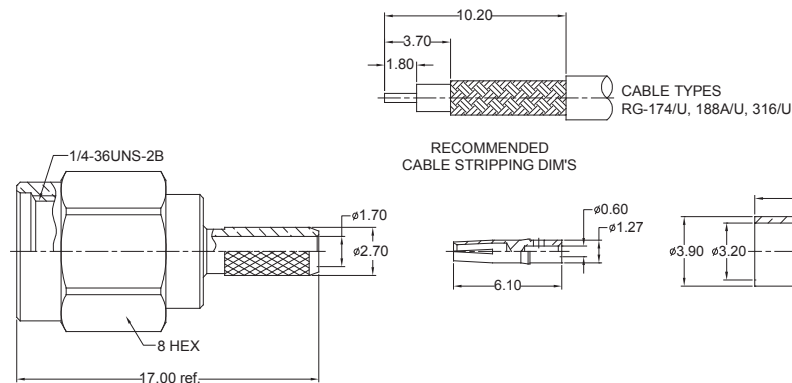


RECOMMENDED
CABLE STRIPPING DIM'S



R/A CRIMP PLUG



Order Code
RFP-SRR-C1N502-58

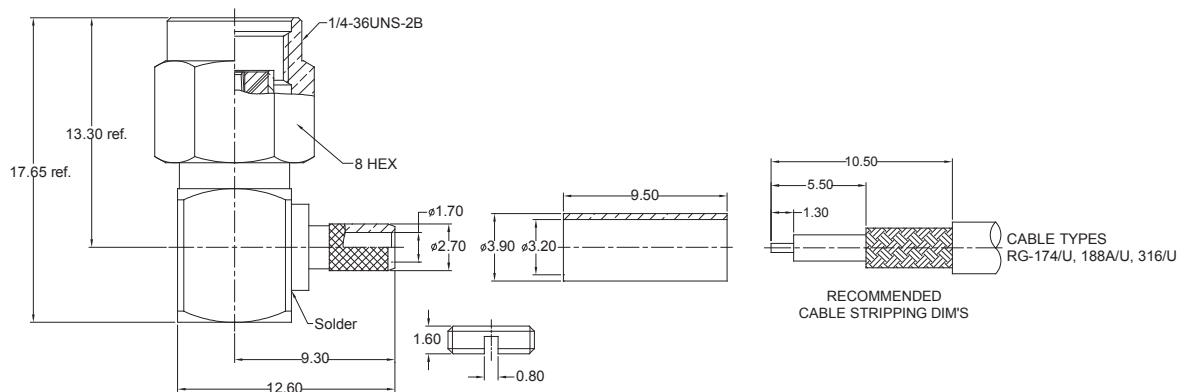

RECOMMENDED
CABLE STRIPPING DIM'S

Other SMA Reverse types available on request